

SLATTED FLOOR MIXER



RECK

PORCO

for pigsties

Dissolves surface crusts and homogenizes settlings

The slatted floor mixer PORCO for pigsties dissolves surface crusts and homogenizes settlings. Fly broods on the surface crust will be destroyed in a natural way as well as places with problems as in the feeding and the dunging area. The special

shaped folding propeller produces a well-aimed, bundled sharp mixing jet through the centrifugal force. The propeller blades open through the centrifugal force as soon as the motor is switched on. Easily stirring through the fissures without moving elements, safety for men and animals.

For the PORCO mixer a width of the fissures up from 1,7 cm and a length of the fissures up from 16 cm is needed. With a mixer sword lengths from 70 cm up to 160 cm, as well as different motor engine performances (4 kW to 7,5 kW) the mixer can be used for different constructional circumstances.

homogeneous naturally

with and



The slatted floor mixer PROCO is slim, agile and easy to handle.



The folding propeller has a high mixing performance with 1450 rpm.



The **propeller blades** open through the centrifugal force as soon as the motor is switched on.

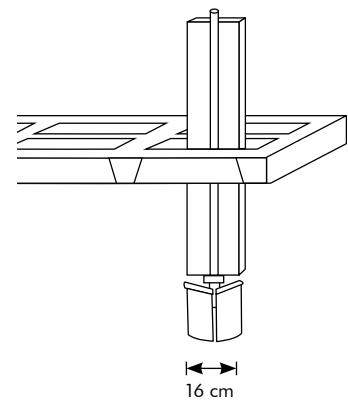

TORRO

for cowsheds

Trouble-free, easy and effective!

Without removing the slatted floor mixer you can easily and safely stir up the whole channel width. In long slatted floor fissures, e.g. at the edge of each element of the slatted floor, the mixer can be pushed crossways over the whole channel width.

Due to the folding hinge mixer sword the motor can be totally put down in case of transport. The centre of gravity sinks considerably. This is very practical for the transport. With the folding hinge mixer sword it is also very simple to change sword from cattle to pig version (or backwards). Due to the folded up mixer sword, the slatted floor mixer can be transported optimally.




For the TORRO mixer a width of the fissures up from 2,6 cm and a length of the fissures up from 25 cm is needed. With mixer sword lengths from 70 cm up to 160 cm, as well as different motor engine performances (5,5 kW to 11 kW) the mixer can be used in different constructional circumstances.

Without big time effort

Without removing the slatted floor mixer you can stir up the whole channel width.

Folding **hinge mixer sword** for an easy mixer transport. (accessory)

The **propeller blades** open through the centrifugal force as soon as the motor is switched on.

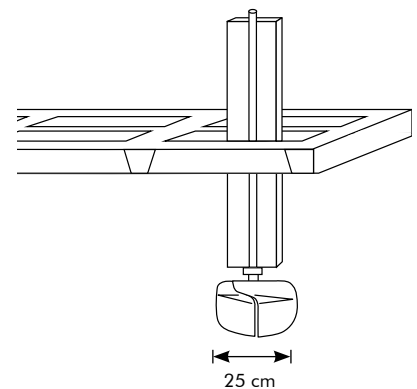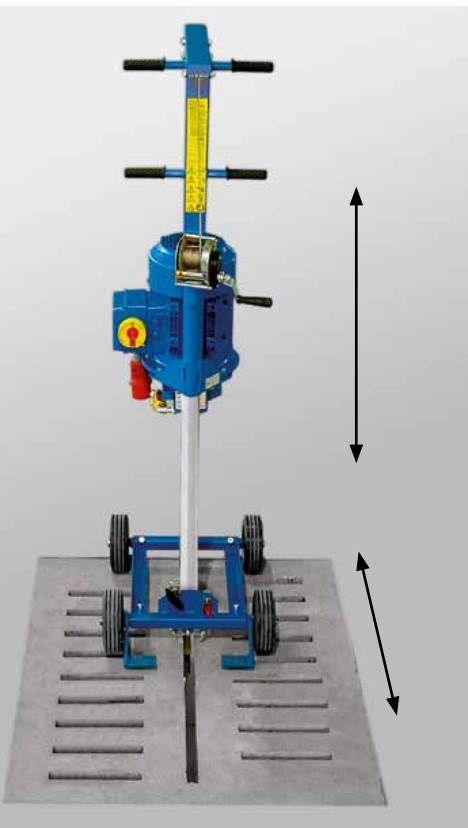

MINNER





With the **turntable**, the propeller can be easily turned into the right position to get it out through the fissures.



When stirring up dry channels **the water flows** directly in the propeller current and causes faster a running homogeneous slurry. With the water supply the life of the special slide bearings can be prolonged considerably.




With the turn off tap it is **possible** to turn off the water supply so that the hose can also be uncoupled under pressure directly at the mixer. (accessory)

Features Details

Without big effort

Use the **advantages of the** double swing device. With the double swing device (accessory) the stir up area can be enlarged.

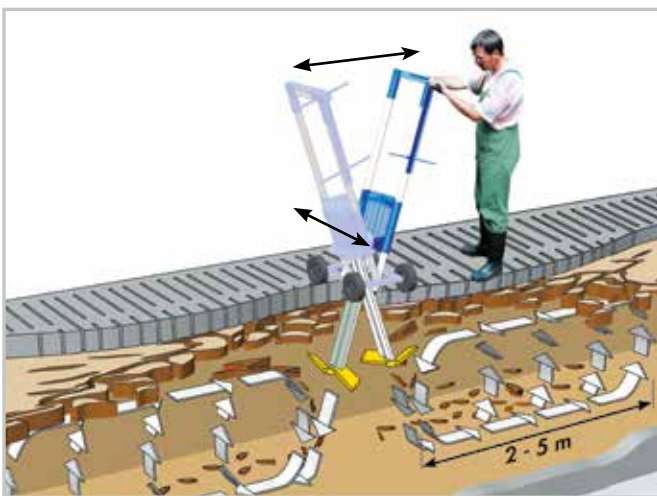

Before mixing for the first time the surface crust is usually very thick! The created intensive stream pulls the surface crust bit by bit from the top into the high performance folding propeller. You'll achieve the best mixing result.

Due to the folding hinge mixer sword **the motor can be totally** put down in case of transport. (accessory)



This is very practical during transport. An additional transport cart is not necessary. When folding up no slurry flows over the motor.

SLATTED FLOOR MIXER



RECK